

craterlake

craterlake

TECHNICAL STANDARDS

Description	ASTM	ANSI	Result
Water Absorption	C-373	≤ 3%	≤ 0.5%
Break Strength (lbs.)	C-648	≥ 250 lbs	Min. 350 lbs
Scratch Hardness	MOH's Scale	N/A	7
Chemical Resistance	C-650	Unaffected	Unaffected
Frost Resistance	C-1026	Resistant	Resistant
Group	C-1027	N/A	4
Minimum Bond Strength (PSI)	C-482	≥ 50 lbs	Approx. 260
Shade and Texture Rating	V	N/A	V3
Coefficient of Friction/ Dry	C-1028	Varies	≥ 0.70
Coefficient of Friction/ Wet	C-1028	Varies	≥ 0.65

AVAILABLE TRIM

Trim	Bullnose	Bullnose
Size	3 x 12	3 x 17
Arena	LFCL490-S43C9	LFCL490-S43H9
Bamboo	LFCL491-S43C9	LFCL491-S43H9
Fuego	LFCL492-S43C9	LFCL492-S43H9
Lava	LFCL493-S43C9	LFCL493-S43H9
Petra	LFCL494-S43C9	LFCL494-S43H9

PRODUCT CHARACTERISTICS

- Rustic Style
- Environmentally Friendly Alternative to Natural Stone
- Easy to Clean and Maintain

APPLICATIONS

- Ideal for Commercial/Residential Applications
- Bullnose and Inserts for Complete Floor Installations

# craterlake

GLAZED PORCELAIN



**ARENA**



18 x 18 (17½ x 17½)  
LFCL490-18  
12 x 12 (11¾ x 11¾)  
LFCL490-12




Border  
6 x 17½  
LFCL490-B



Insert/Corner  
6 x 6  
LFCL490-IC

**BAMBOO**



18 x 18 (17½ x 17½)  
LFCL491-18  
12 x 12 (11¾ x 11¾)  
LFCL491-12



Border  
6 x 17½  
LFCL491-B



Insert/Corner  
6 x 6  
LFCL491-IC

**FUEGO**



18 x 18 (17½ x 17½)  
LFCL492-18  
12 x 12 (11¾ x 11¾)  
LFCL492-12



Border  
6 x 17½  
LFCL492-B



Insert/Corner  
6 x 6  
LFCL492-IC

**LAVA**



18 x 18 (17½ x 17½)  
LFCL493-18  
12 x 12 (11¾ x 11¾)  
LFCL493-12



Border  
6 x 17½  
LFCL493-B



Insert/Corner  
6 x 6  
LFCL493-IC

**PETRA**



18 x 18 (17½ x 17½)  
LFCL494-18  
12 x 12 (11¾ x 11¾)  
LFCL494-12




Border  
6 x 17½  
LFCL494-B



Insert/Corner  
6 x 6  
LFCL494-IC

• Sizes in ( ) indicate nominal size.

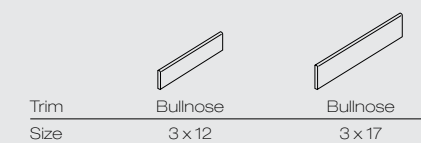

• See back page for more details.