


PIETRA PORCELAIN TILE



PIETRA PORCELAIN TILE

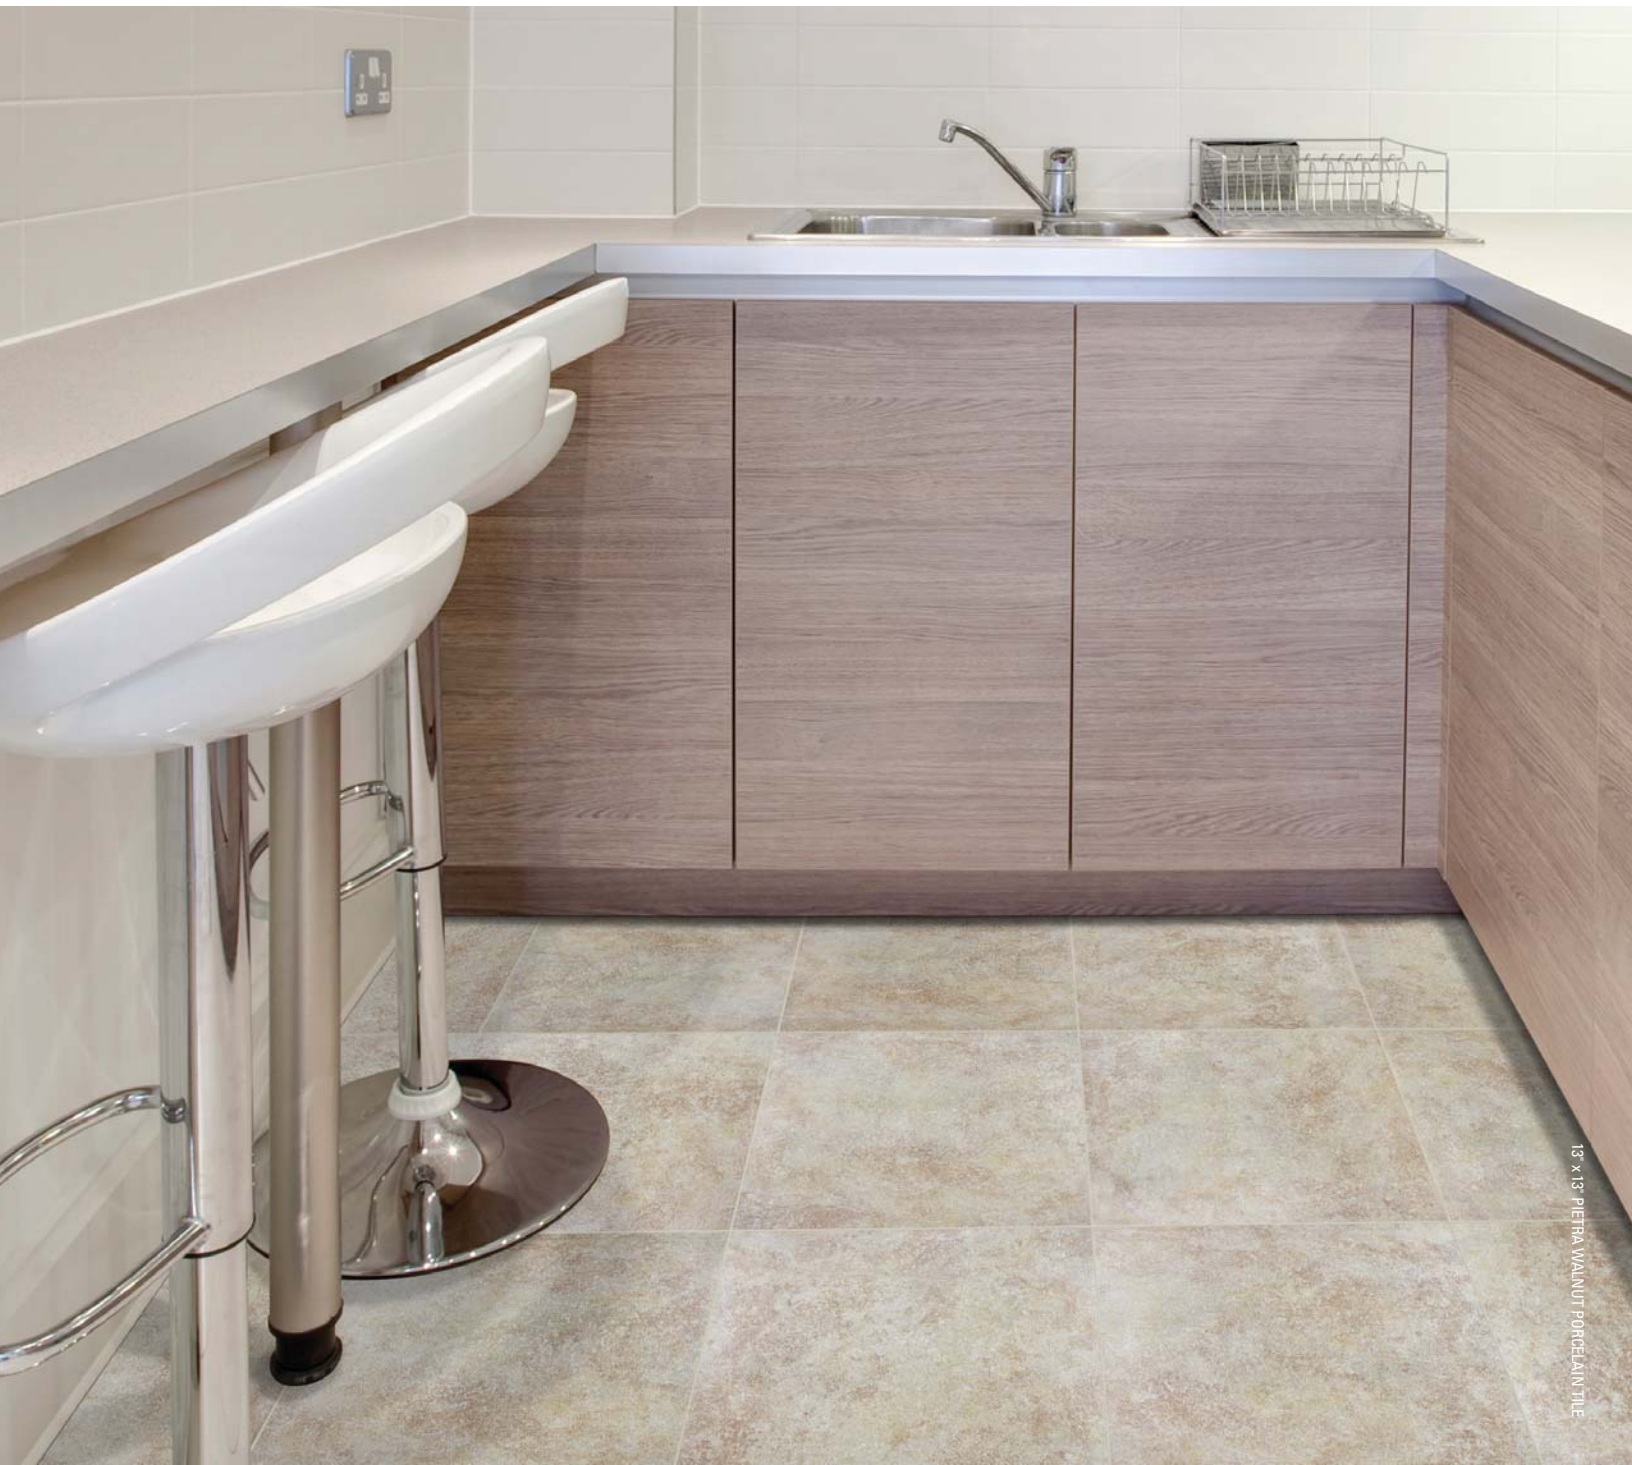

13" x 13" PIETRA DESERT PORCELAIN TILE
46-094



3" x 8" PIETRA DESERT BULLNOSE
52-195



8" x 10" PIETRA DESERT WALL TILE
52-091



13" x 13" PIETRA WALNUT FLOOR TILE
46-095



3" x 8" PIETRA WALNUT BULLNOSE
52-196



8" x 10" PIETRA WALNUT WALL TILE
52-095

PIETRA PORCELAIN TILE



13" x 13" PIETRA SAFARI PORCELAIN TILE
46-096



3" x 8" PIETRA SAFARI BULLNOSE
52-197



8" x 10" PIETRA SAFARI WALL TILE
52-099

PACKAGING INFORMATION

DESCRIPTION	DESERT	ITEM CODE		LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
		WALNUT	SAFARI					
13" x 13" PIETRA PORCELAIN TILE	46-094	46-095	46-096	44.22	11	12.91	58	748.90
8" x 10" PIETRA WALL TILE	52-091	52-095	52-099	26.62	20	10.76	92	989.92
3" x 8" PIETRA BULLNOSE	52-195	52-196	52-197	12.87	30	N/A	105	3150 pcs.

GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	13" x 13"
THICKNESS		mm – in	7.6 mm – 5/16"
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 0.5
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	4
SCRATCH HARDNESS		(Mohs)	7
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 300
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Resistant
FROST RESISTANCE	EN ISO 10545-12		Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.60
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.70
DCOF (WET)	ANSI B101.3		≥ 0.42
SHADE VARIATION			V2